

Supports

Because Key's [Iso-Flo®](#) and [Impulse™](#) vibratory conveyors require only four mounting points, you have several support options. Four columns, one near each corner; two T-pedestals, one near each end. For overhead installation, four turnbuckles can be attached to cables, one near each corner. Iso-Flo® shakers can also be mounted on a special frame with several options for mobile use. Each support option is designed for simple and economical installation, quick and thorough cleaning, and reliable service. All are plant proven in the food industry.

Mobile Units

- Subframe with casters
- Complete mobility on smooth, level surfaces
- Allows quick line changeover, reducing downtime
- Adjustable height designs



Mobile Unit



Turnbuckle


Turnbuckles for Overhead Suspension

- Iso-flo® shakers run as smoothly suspended from above as supported from below
- Only four suspension points per shaker
- Economical installation when adequate overhead structure is available
- Key supplies turnbuckles or eyebolts, which attach to customer-supplied cables

T-Pedestals

- Only two T-pedestal supports required per Iso-Flo® shaker
- Materials: Type 304 stainless steel or coated mild steel
- Coating: Superlife-316® or epoxy
- Optional field-welded slipjoints simplify installation
- New sanitary design

T-pedestal

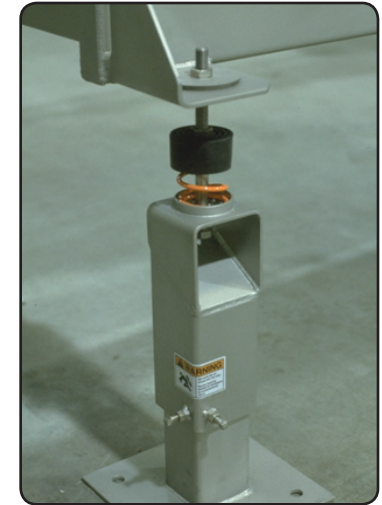

Corner Column

Corner Columns

- Four columns instead of multiple supports required by competition
- Materials: Type 304 stainless steel or coated mild steel
- Coating: Superlife-316® or epoxy
- Optional field-welded slipjoints simplify installation
- Optional thermoplastic coating

Key Technology

150 Avery Street • Walla Walla, WA 99362 • USA

Phone: 509.529.2161 • Fax: 509.527.1331 • product.info@key.net • www.key.net

